
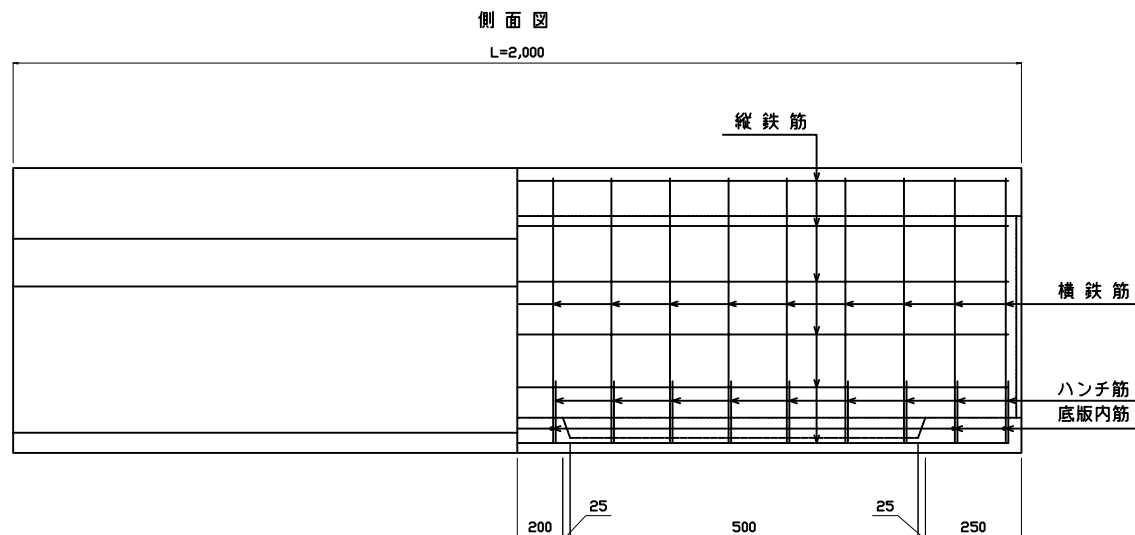


勾配調整型側溝 歩道用 (TKドレーン 1種)

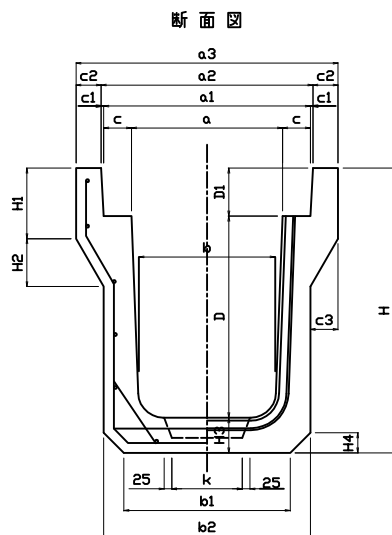

呼び名 a × D	形状寸法 (mm)																	横鉄筋 径 × 本	縦鉄筋 径 × 本	ハンチ筋 径 × 本	底版内筋 径 × 本	重量 (kg)				
	a1	a2	a3	b	b1	b2	c	c1	c2	c3	D1	H	H1	H2	H3	H4	k									
300 × 300	410	420	500	280	360	400	55	5	40	50	95	455	120	87	60	20	90	φ4 × 10	φ4 × 12	φ4 × 6	284					
300 × 400				270								560			65		80				φ4 × 12	344				
300 × 500				260	665	70						70			φ5 × 10	409										
300 × 600				254	755	60						84			D6 × 10	468										
300 × 700				254	865	70						40			φ4 × 16	567										
400 × 400	510	520	600	370	460	500					5	5	40	50	110	575	135	87		65	20	180	φ4 × 10	φ4 × 12	φ4 × 6	367
400 × 500				360												680				70		170				φ5 × 10
400 × 600				352	770	60										162				D6 × 10	484					
400 × 700				344	880	70										154				φ4 × 16	624					
400 × 800				336	985	75										146				D6 × 11	672					
500 × 500	620	630	720	460	560	600	60	5	45	60					125	695	150	104	70	20	270	φ5 × 10	φ4 × 12		φ4 × 6	492
500 × 600				450												800			75		260					φ4 × 18
500 × 700				440	915	65										250			D6 × 10	653						
500 × 700				440	915	65										250			D6 × 10	653						
500 × 800				436	1000	60										246			D6 × 11	728						